



A_D-1W & B_LD-1W Series

1W, FIXED INPUT, ISOLATED & UNREGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



High Efficiency up to 80%
1KVDC Isolation
DIP Package
Internal SMD Construction
Temperature Range: -40°C to +85°C
No Heatsink Required
No External Component Required
Industry Standard Pinout
RoHS Compliance

APPLICATIONS

The A_D-1W & B_LD-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

A0505D-1W

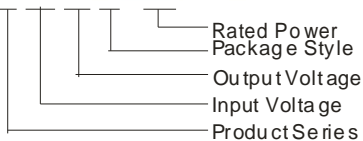

MORNSUN Science& Technology Ltd.
Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
<http://www.mornsun-power.com>

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)	Certificate	
	Voltage (VDC)		Voltage (VDC)	Current (mA)				
	Nominal	Range		Max	Min			
B0303LD-1W	3.3	3.0-3.6	3.3	303	31	72		
B0305LD-1W			5	200	20	74		
A0505D-1W	5	4.5-5.5	± 5	± 100	± 10	72	UL	
A0509D-1W			± 9	± 56	± 6	77	UL	
A0512D-1W			± 12	± 42	± 5	79	UL	
A0515D-1W			± 15	± 33	± 4	80	UL	
B0505LD-W5			5	100	10	68		
B0505LD-1W			5	200	20	70	UL CE	
B0509LD-1W			9	111	12	78	UL CE	
B0512LD-1W			12	83	9	78	UL CE	
B0515LD-1W			15	67	7	80	UL CE	
A1205D-1W			12	10.8-13.2	± 5	± 100	± 10	72
A1209D-1W	± 9	± 56			± 6	78	UL	
A1212D-1W	± 12	± 42			± 5	79	UL	
A1215D-1W	± 15	± 33			± 4	78	UL	
B1203LD-1W	3.3	303			31	73		
B1205LD-1W	5	200			20	71	UL CE	
B1209LD-1W	9	111			12	76	UL CE	
B1212LD-1W	12	83			9	78	UL CE	
B1215LD-1W	15	67			7	79	UL CE	
A1505D-1W	15	13.5-16.5			± 5	± 100	± 10	72
B1515LD-1W			15	67	7	75		
A2405D-1W	24	21.6-26.4	± 5	± 100	± 10	73	UL	
A2409D-1W			± 9	± 56	± 6	79	UL	
A2412D-1W			± 12	± 42	± 5	80	UL	
A2415D-1W			± 15	± 33	± 4	80	UL	
B2405LD-1W			5	200	20	73	UL CE	
B2409LD-1W			9	111	12	78	UL CE	
B2412LD-1W			12	83	9	78	UL CE	
B2415LD-1W			15	67	7	79	UL CE	
B2424LD-1W			24	42	4	78		

Note: The A_D-W25/B_LD-W25 series also are available in our company.

COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Operating Temp.		-40		85	°C
Storage Temp. Range		-55		125	
Storage humidity				95	%
Cooling		Free air convection			
Temp. rise at full load			15	25	°C
Lead temperature	1.5mm from case for 10 seconds			300	
Isolation voltage	Tested for 1 minute and 1 mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Short circuit protection*				1	s
Case material		Plastic (UL94-V0)			
MTBF		3500			K hours
Weigh			2.1		G



*supply voltage must be discontinued at the end of short circuit duration.

OUTPUT SPECIFICATIONS						
Item	Test conditions		Min	Typ	Max	Units
Output power			0.1		1	W
Line regulation	For Vin change of 1%	(3.3V output)			±1.5	
		(Other output)			±1.2	
Load regulation	10% to 100% load	(3.3V output)		12	20	%
		(5V output)		10.5	15	
		(9V output)		8.3	15	
		(12V output)		6.8	15	
		(15V output)		6.3	15	
Output voltage accuracy	See tolerance envelope graph					
Temperature drift	100% full load				0.03	%/°C
Ripple & Noise*	20MHz Bandwidth	(AXXXX-1W)		50	75	mVp-p
		(BXXXX-1W)		75	100	
		(A/BXX24D-1W)		100	150	
Switching frequency	Full load, nominal input			100		KHz


*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:
 1.All specifications measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
 2.Dual output models unbalanced load: ±5%.

TYPICAL CHARACTERISTICS

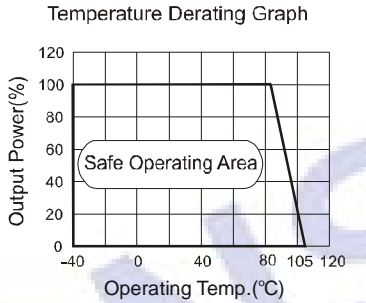
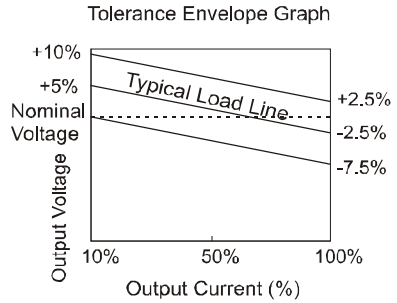


OUTLINE DIMENSIONS & PIN CONNECTIONS

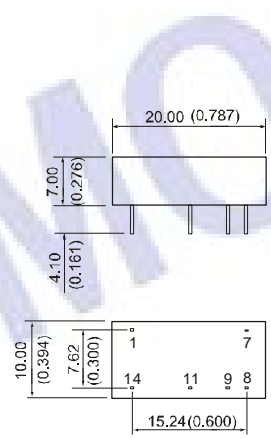

First Angle Projection

RECOMMENDED FOOTPRINT
 Top view, grid: 2.54mm (0.1inch), diameter: 1.00mm



Pin	Single	Dual
1	GND	GND
7	NC	NC
8	0V	0V
9	+Vo	+Vo
11	No Pin	-Vo
14	Vin	Vin

Note:
 Unit:mm (inch)
 Pin section: 0.50*0.30mm (0.020*0.012inch)
 Pin tolerances: ±0.10mm (±0.004inch)
 General tolerances: ±0.25mm (±0.010inch)

APPLICATION NOTE


Requirement on output load
 To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (A_D -W25/B_LD-W25 series)

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

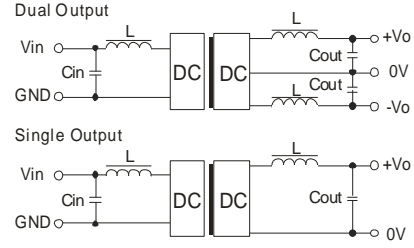

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 1).


EXTERNAL CAPACITOR TABLE (Table 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cou (uF)
5	4.7	5	10	±5	4.7
12	2.2	9	4.7	±9	2.2
15	2.2	12	2.2	±12	1
24	1	15	1	±15	0.47

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

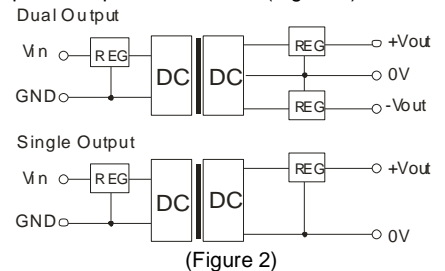

(Figure 2)

No parallel connection or plug and play.