



PWA_LT-1W5 & PWB_LT-1W5 Series

1.5W, WIDE INPUT ISOLATED & REGULATED SINGLE/DUAL OUTPUT DC/DC CONVERTER MINIATURE SMD PACKAGE

multi-country patent protection **RoHS**

FEATURES

Wide (4:1) Input Range
 Short Circuit Protection(automatic recovery)
 1500VDC Isolation
 Operating Temperature: -40°C to +85°C
 No Heat Sink Required
 No external component required
 MTBF>1,000,000 hours
 RoHS Compliance

APPLICATIONS


The PWA_LT-1W5 & PWB_LT-1W5 Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range(voltage range \leq 4:1);
- 2) Where isolation is necessary between input and output (Isolation Voltage \leq 1500 VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

MODEL SELECTION

PWA2405LT-1W5

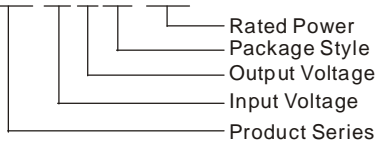

MORNSUN Science& Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China
 Tel: 86-20-38601850
 Fax: 86-20-38601272
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (% , Typ)
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal	Range	Max**		Max	Min	
PWA2405LT-1W5	24	9.0-36	40	±5	±150	±15	76
PWA2412LT-1W5*				±12	±63	±6	79
PWA2415LT-1W5*				±15	±50	±5	80
PWA4805LT-1W5*	48	18-72	80	±5	±150	±15	76
PWA4812LT-1W5*				±12	±63	±6	79
PWA4815LT-1W5*				±15	±50	±5	80
PWB2403LT-1W5*	24	9.0-36	40	3.3	455	45	74
PWB2405LT-1W5*				5	300	30	76
PWB2409LT-1W5*				9	167	17	78
PWB2412LT-1W5*				12	125	12	79
PWB2415LT-1W5*				15	100	10	80
PWB4803LT-1W5*	48	18-72	80	3.3	455	45	74
PWB4805LT-1W5*				5	300	30	76
PWB4809LT-1W5*				9	167	17	78
PWB4812LT-1W5*				12	125	12	79
PWB4815LT-1W5*				15	100	10	80

*Designing.

** Input voltage can't exceed this value, or will cause the permanent damage.

Note: The load shouldn't be less than 10%, otherwise ripple will increase dramatically.

Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

ISOLATION SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation Capacitance	Input/Output		85		PF

OUTPUT SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Output Power	See Below Products Program	0.15		1.5	W
Output Voltage Accuracy	Refer To Recommended Circuit		±1	±3	
Load Regulation	From 10% To 100% Load		±0.5	±1.5	%
Line Regulation	Input Voltage From Low To High		±0.2	±0.75	
Temperature Drift (Vout)	Refer To Recommended Circuit			0.03	%/°C
Output ripple& Noise*	20MHz Bandwidth		35	75	mVp-p
Switching Frequency	100% Load, Nominal Input Voltage		300		KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:


1.All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

2.See below recommended circuits for more details.


COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Storage humidity range				95	%
Operating Temp. range		-40		85	°C
Storage Temp. range		-55		125	
Temp. rise at full load			15	35	
Lead temperature	1.5mm from case for 10 seconds			245	
Short circuit protection		Continuous, automatic recovery			
Cooling		Free air convection			
MTBF		1000			K hours
Weight			5.2		g


TYPICAL TEMPERATURE CUTVE

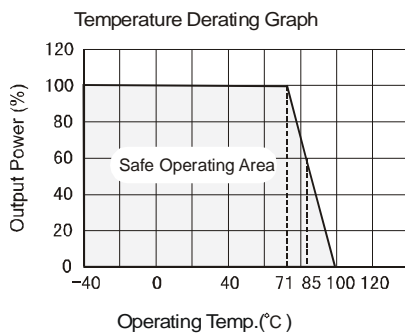

RECOMMENDED REFLOW SOLDERING PROFILE

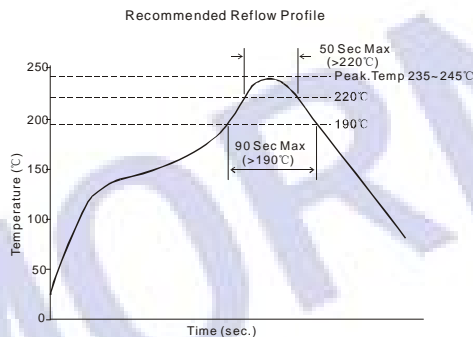

OUTLINE AND SOLDER PAD DIMENSIONS

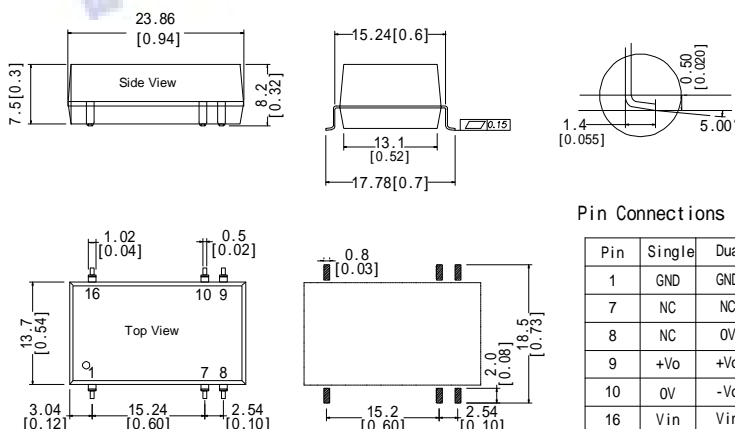

Note: Unit: mm[inch]; Tolerance: ±0.25mm; All Pins on a 2.54mm .

APPLICATION NOTE

Recommended Circuit

All the PWA_LT-1W5 & PWB_LT-1W5 Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. (see Figure 1).

Single Vout



Dual Vout



(Figure 1)


If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high. (Table 1)

External Capacitor Table (Table 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
12	100	3.3	2200	±5	560
24	10-47	5	1000	±9	470
48	10-47	9	680	±12	330
-	-	12	470	±15	220
-	-	15	330	-	-

Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the flash startup current of this kind of DC/DC module. (Figure 2) Generally: $I_p \leq 1.4 * I_{in-max}$



(Figure 2)

Requirement Output Load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load **no less than 10% load**. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

No parallel connection or plug and play.