


IB_LD-1W & IB_LS-1W Series

1W, FIXED INPUT, ISOLATED & REGULATED
SINGLE OUTPUT DC-DC CONVERTER



multi-country patent protection **RoHS**

FEATURES

Small Footprint
SIP/DIP Package
Low Ripple and good EMC features
Temperature Range: -40°C to +85°C
No Heat Sink Required
No External Component Required
1KVDC Isolation
Internal SMD construction
Continuous Short Circuit Protection
Industry Standard Pinout
RoHS Compliance

APPLICATIONS


The IB_LD-1W & IB_LS-1W Series are specially designed for applications where a single power supply is highly isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple and noise are demanded.

MODEL SELECTION

IB0515LS-1W

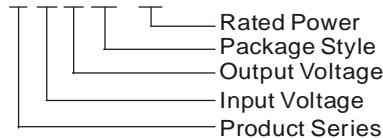

MORNSUN Science& Technology co.,Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
<http://www.mornsun-power.com>

PRODUCT PROGRAM

| Part Number | Input | | Output | | | Efficiency (% Typ) | Package |
|---------------|---------------|-------------|---------------|--------------|-----|--------------------|---------|
| | Voltage (VDC) | | Voltage (VDC) | Current (mA) | | | |
| | Nominal | Range | | Max | Min | | |
| IB0505LD-W75 | 5 | 4.75-5.25 | 5 | 150 | 15 | 68 | DIP |
| IB0509LD-1W | | | 9 | 111 | 12 | 70 | DIP |
| IB0512LD-1W | | | 12 | 83 | 9 | 71 | DIP |
| IB0515LD-1W | | | 15 | 67 | 7 | 73 | DIP |
| IB0505LS-W75 | | | 5 | 150 | 15 | 68 | SIP |
| IB0509LS-1W | | | 9 | 111 | 12 | 70 | SIP |
| IB0512LS-1W | | | 12 | 83 | 9 | 71 | SIP |
| IB0515LS-1W | | | 15 | 67 | 7 | 73 | SIP |
| IB1205LD-W75 | | | 12 | 11.4-12.6 | 5 | 150 | 15 |
| IB1209LD-1W | 9 | 111 | | | 12 | 72 | DIP |
| IB1212LD-1W | 12 | 83 | | | 9 | 70 | DIP |
| IB1215LD-1W | 15 | 67 | | | 7 | 74 | DIP |
| IB1205LS-W75 | 5 | 150 | | | 15 | 68 | SIP |
| IB1209LS-1W | 9 | 111 | | | 12 | 72 | SIP |
| IB1212LS-1W | 12 | 83 | 9 | 70 | SIP | | |
| IB1215LS-1W | 15 | 67 | 7 | 74 | SIP | | |
| IB1505LS-W75 | 15 | 14.25-15.75 | 5 | 150 | 15 | 70 | SIP |
| IB1509LS-1W * | | | 9 | 111 | 12 | 71 | SIP |
| IB1512LS-1W * | | | 12 | 83 | 9 | 71 | SIP |
| IB1515LS-1W | | | 15 | 67 | 7 | 72 | SIP |
| IB2405LD-W75* | 24 | 22.8-25.2 | 5 | 150 | 15 | 68 | DIP |
| IB2409LD-1W | | | 9 | 111 | 12 | 68 | DIP |
| IB2412LD-1W | | | 12 | 83 | 9 | 73 | DIP |
| IB2415LD-1W | | | 15 | 67 | 7 | 75 | DIP |
| IB2405LS-W75 | | | 5 | 150 | 15 | 68 | SIP |
| IB2409LS-1W | | | 9 | 111 | 12 | 68 | SIP |
| IB2412LS-1W | | | 12 | 83 | 9 | 73 | SIP |
| IB2415LS-1W | | | 15 | 67 | 7 | 75 | SIP |

* Designing.

COMMON SPECIFICATION

| Item | Test condition | Min | Typ | Max | Units |
|--------------------------|--------------------------------|---------------------|-----|-----|---------|
| Storage humidity | | | | 95 | % |
| Operating temperature | | -40 | | 85 | °C |
| Storage temperature | | -55 | | 125 | |
| Temp. rise at full load | | | 15 | 25 | |
| Lead temperature | 1.5mm from case for 10 seconds | | | 300 | |
| Short circuit protection | | Continuous | | | |
| Cooling | | Free air convection | | | |
| Case material | | Plastic(UL94-V0) | | | |
| MTBF | | 3500 | | | K hours |
| Weight | | | 2.1 | | g |

ISOLATION SPECIFICATIONS

| Item | Test condition | Min | Typ | Max | Units |
|----------------------|---------------------|------|-----|-----|-------|
| Isolation voltage | Tested for 1 minute | 1000 | | | VDC |
| Isolation resistance | Test at 500VDC | 1000 | | | MΩ |

OUTPUT SPECIFICATIONS


| Item | Test Conditions | Min | Typ | Max | Units |
|-------------------------|--------------------------|-----|-----|-------|-------|
| Output power | | 0.1 | | 1 | W |
| Line regulation | For Vin change of 5% | | | ±0.25 | % |
| Load regulation | 10% to 100% load | | | ±1 | |
| Output voltage accuracy | 100% full load | | | ±3 | |
| Temperature drift | 100% full load | | | 0.03 | %/°C |
| Ripple* | 20MHz Bandwidth | | 10 | 20 | mVp-p |
| Noise* | 20MHz Bandwidth | | 50 | 75 | |
| Switching frequency | Full load, nominal input | | 100 | | KHz |

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


Note:

- All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- See below recommended circuits for more details.


TYPICAL TEMPERATURE CURVE

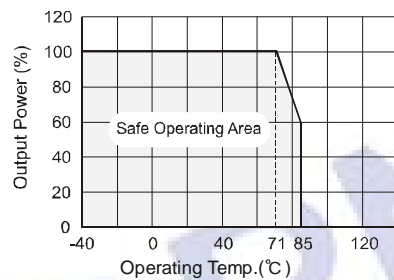

OUTLINE DIMENSION & PIN CONNECTIONS

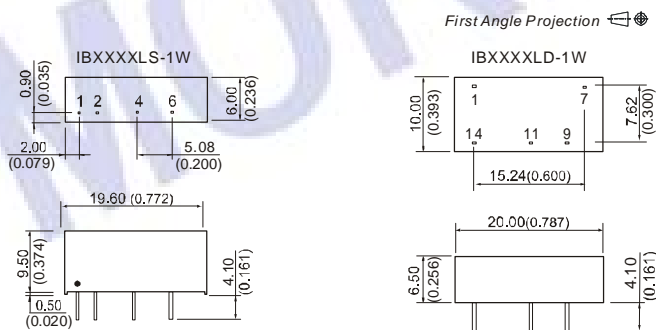


RECOMMENDED FOOTPRINT
Top view, grid: 2.54*2.54mm (0.1*0.1inch),
diameter: 1.00mm (0.039inch)



FOOTPRINT DETAILS

| Pin | SIP |
|-----|-----|
| 1 | Vin |
| 2 | GND |
| 4 | 0V |
| 6 | +Vo |

Note:
Unit:mm (inch)
Pin section: 0.50*0.30mm (0.020*0.012inch)
Pin section tolerances: ±0.10mm (±0.004inch)
General tolerances: ±0.25mm (±0.010inch)



FOOTPRINT DETAILS

| Pin | DIP |
|-----|-----|
| 1 | GND |
| 7 | NC |
| 9 | +Vo |
| 11 | 0V |
| 14 | Vin |

NC: No Connection


APPLICATION NOTE

Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (IB_LD -W25/IB_LS-W25 series).

Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

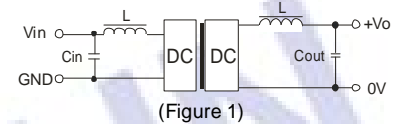

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (Table 1)

| Vin (VDC) | Cin (uF) | Vout (VDC) | Cou (uF) |
|-----------|----------|------------|----------|
| 5 | 4.7 | 5 | 10 |
| 12 | 4.7 | 9 | 4.7 |
| 15 | 2.2 | 12 | 2.2 |
| 24 | 1 | 15 | 1 |

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

No parallel connection or plug and play.